

1.3 Megapixel 30m Infrared IP Dome Camera

Model: VSIP1MPVDMINIIRC



Specifications		
General	Camera Style	Vandal Resistant Mini Dome
	Image Sensor	1/3" 1.3 Megapixel CMOS
	Effective Pixels	1280 (H) x 960 (V)
	Signal Noise Ratio	> 50dB
Camera	Lens	3.6mm Fixed Lens
	Angle of View	70°
	Electronic Shutter	Auto/Manual, 1/3(4) ~ 1/10000s
	Minimum Illumination	0.05 Lux at F1.2 (Colour) / 0.005 Lux at F1.2 (B&W)
	Day/Night	Auto (ICR) / Colour/B&W
	White Balance	Auto
	Noise Reduction	3D Digital Noise Reduction
	Gain Control	Auto/Manual
	Backlight Compensation	BLC / HLC / DWDR
	Audio Input	Built-in microphone
	Audio Compression	G.711a / G.711u (64kbps) / PCM (128kbps)
	Alarm Interface	N/A
	Network Interface	RJ45 (10/100 Base-T)
	Memory Slot	N/A
Video	Bit Rate	H.264: 56K ~ 8192Kbps
	Video Compression	H.264 / MJPEG
	Resolution	1.3MP (1280x960) / 720p (1280x720) / D1 (704x576)
	Frame Rate	1.3MP/720p (1 ~ 25/30fps)
Environment	Video Output	N/A
	Ingress Protection	IP66
	Vandal Resistant	IK10
	Maximum Infrared Range	30m
	Power Input	12VDC / PoE (802.3af)
	Power Consumption	< 4W
	Dimensions	Ø107 x 84.1mm
	Weight	0.29kg
Operating Environment	-20° to 60°C / RH95% (max)	

Product Highlights


- Record up to 1.3MP (1280 x 960) at 25fps
- 3.6mm fixed lens with 70° viewing angle
- 30m infrared range & IP66/IK10 rated housing

Product Overview

The VIP Vision VSIP1MPVDMINIIRC is a compact 1.3 Megapixel IP dome camera capable of streaming beyond 720p high definition footage.

This camera features up to 1.3MP (1280 x 960) image resolution with 30m infrared range for low light and night video capture.

The camera housing is IK10 vandal resistant and is IP66 rated, making it suitable for outdoor surveillance.

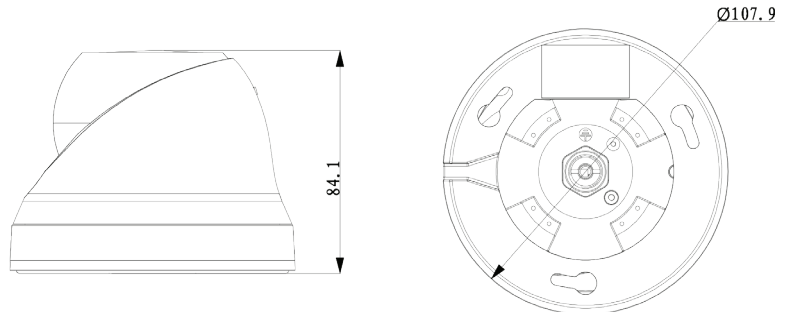

Your VIP Vision IP surveillance dealer: